


# Anoxic Zone Mixing



- 5 and 10 HP Models
- Flow rates from 8,000 to 20,000 GPM, depending on HP and RPM
- Wastewater lubricated bearing
- Units easily installed or removed for service
- Optional EZ Access features for maintenance

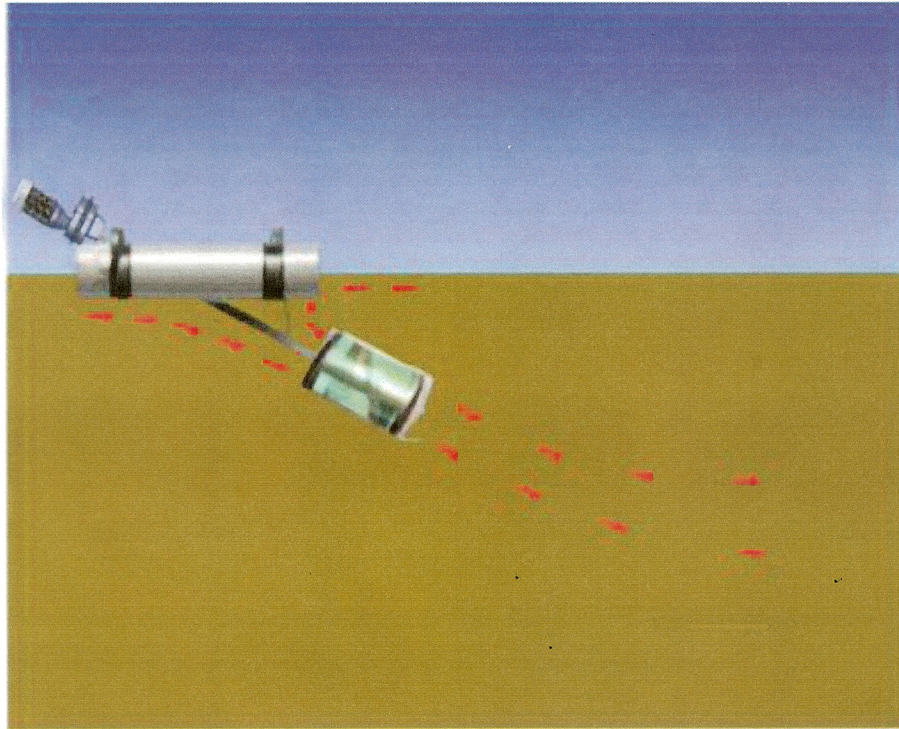