


MAXFLO Floating Directional Mixers

S&N
AIROFLO

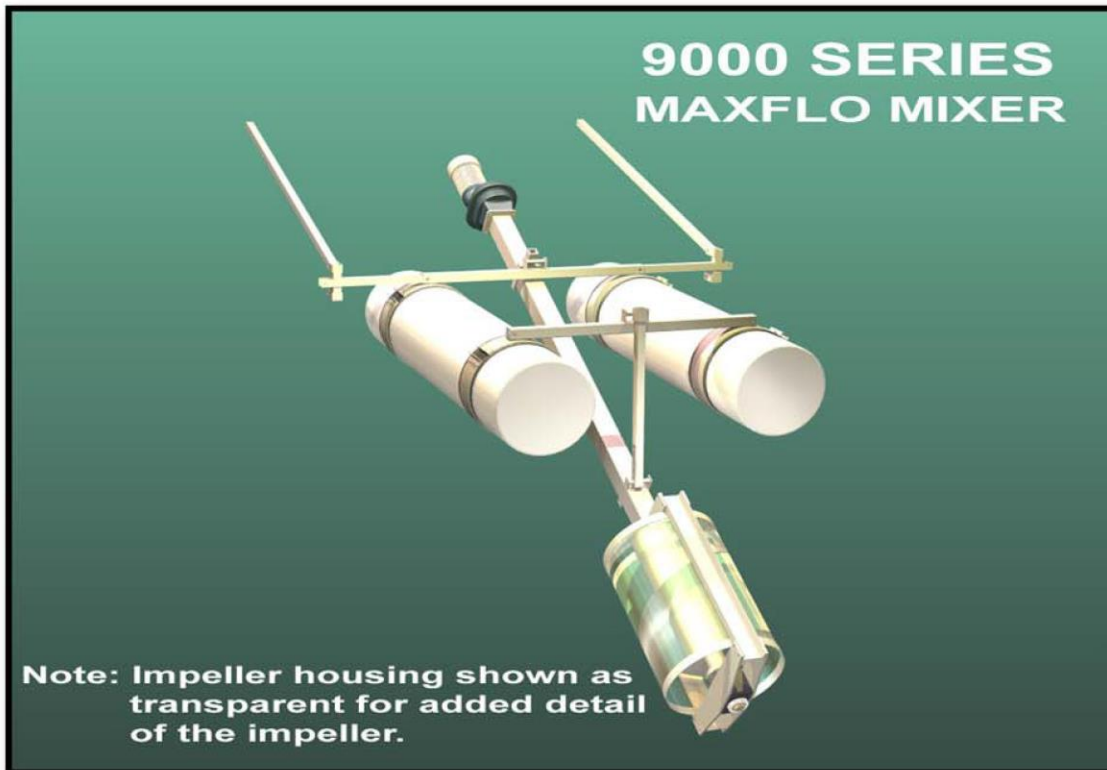


Save energy by applying S&N Airoflo's low speed, low HP mixers, with high pumping rates and directional flow.

APPLICATIONS:

- * Anoxic mixing for denitrification in the activated sludge process.
- * Enhances the performance of your floating aerators in applications where mixing dominates.
- * Improves the performance of facultative lagoons by reducing algal growth, odor, short circuiting, and build-up of sludge and floating debris.

3.27.17

LAGOON APPLICATIONS

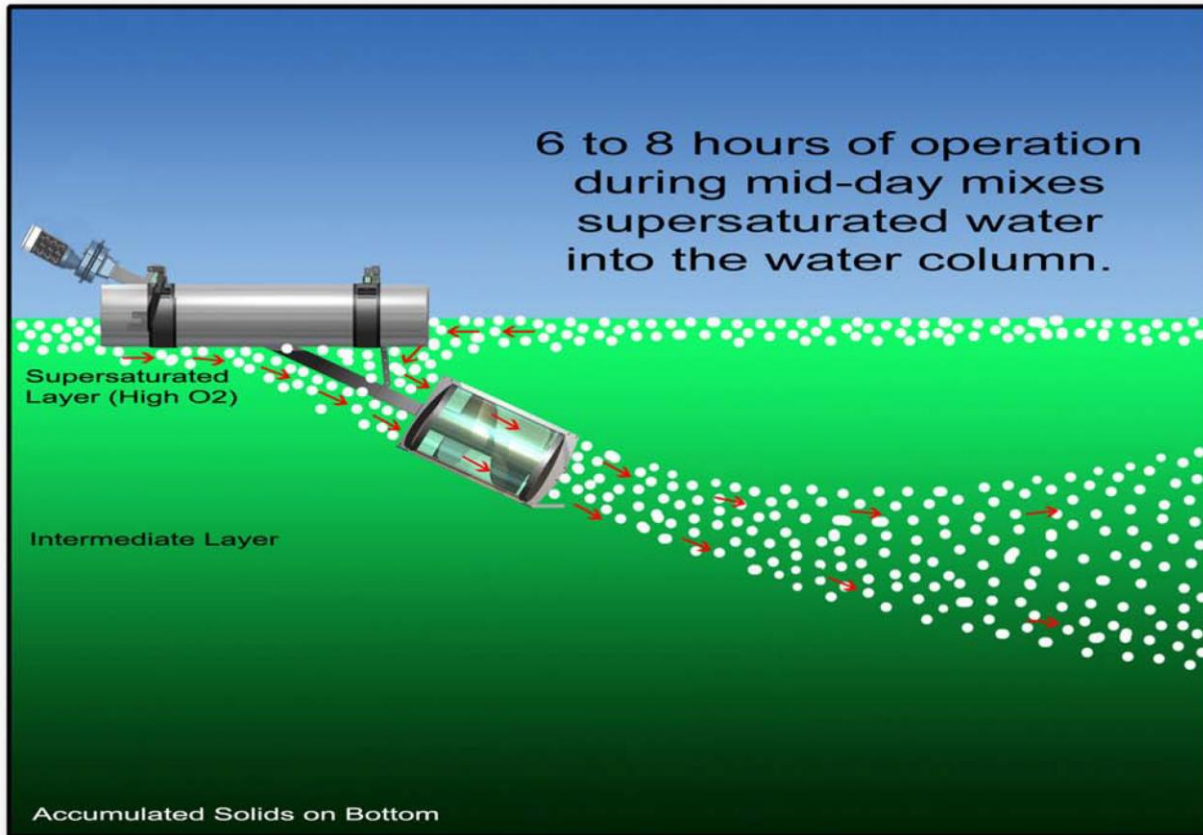

- * 3*, 5 and 10 HP models - in hot dip galvanized or stainless steel - * 3 HP is Belt Drive, 5 & 10 HP Are Direct Drive
- * Flow rates from 6,000 to 20,000 GPM, depending on HP and RPM
- * Wastewater lubricated bearing
- * Units easily removed for service
- * Optional EZ-Access features for maintenance

3.27.17

WWW.AIROFLO.COM